

Rittal – The System.

Faster – better – everywhere.

► Climate Control Quick Reference



ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



FRIEDHELM LOH GROUP

Blue e+ Wall-Mounted Cooling Units

- IP 55
- 1.6-5.8 kW
- Energy efficient
- Touch screen controller
- Nano coating technology
- Multiple mounting positions



HD Air To Water Heat Exchangers

- IP 56/59
- NEMA 4X protection category
- 0.6-1.2 kW
- Easy to clean, hygienic design
- Intelligent comfort controller
- Energy efficient
- Maintenance free
- Optimal for food and consumables industry applications




Wall-Mounted Stainless Steel Cooling Units

- NEMA 4X protection category
- Stainless steel
- 0.55-2.55 kW
- Intelligent comfort controller
- Nano coating technology
- Integrated condensate evaporator
- Suitable for outdoor use



Liquid Cooling Packages

- IP 55
- 9.5 kW
- Heat exchanger in TS8 baying system
- Air outlet from one side only or both sides
- Optimal for extreme ambient conditions

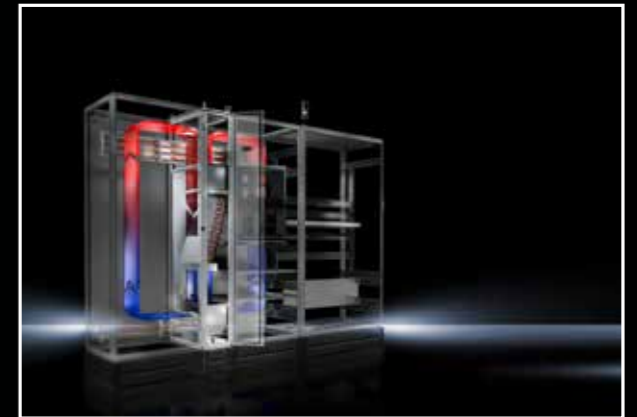

Air To Water Heat Exchangers

- IP 55
- 0.3-7 kW
- Roof and wall-mounted versions
- Intelligent comfort controller
- Energy efficient
- Maintenance free
- Optimal for extreme ambient conditions



Chillers

- Energy efficient
- 1-40 kW
- Intelligent comfort controller
- Nano coating technology
- Ideal for machine and enclosure cooling
- Multiple voltages



Fans & Filters

- IP 51-56
- NEMA 12-4X
- Hose proof hood option
- 20-820 m³/h
- Tool-free assembly
- Reversible / diagonal fan motor



Air To Air Heat Exchangers

- IP 54
- 17.5-90 W/K
- Roof and wall-mounted versions
- Intelligent comfort controller
- Energy efficient
- Maintenance free
- Optimal for extreme ambient conditions



Roof-Mounted Fans

- IP 55
- 500-1069 m³/h
- The same cut-out size for all models
- High energy efficiency



Blue e Roof-Mounted Cooling Units

- IP 54
- 0.55-3.8 kW
- Intelligent comfort controller
- Nano coating technology
- Integrated condensate evaporator
- Ducting capability



Thermoelectric Coolers

- Heat transfer by the peltier effect
- 100 W
- No moving parts
- Compact, lightweight, efficient
- Multiple mounting positions
- 24V DC or dual 100-240V option



Blue e Wall-Mounted Cooling Units

- IP 54
- 0.55-3.95 kW
- Intelligent comfort controller
- Nano coating technology
- Integrated condensate evaporator
- Multiple mounting positions



IT COOLING PRODUCTS

LCU DX

- 3 and 6.5 kW
- Single and redundant version
- Energy efficient
- EC fan technology
- Inverter output-regulated compressor
- Suitable for TS IT racks and micro data centres



Roof-Mounted Cooling Units

- IP 54
- 3 kW
- 230V, 1 ~
- Intelligent comfort controller
- Nano-coated condenser
- Integral electric condensate evaporation
- Air baffle plate included



LCP Rack DX

- 12 kW
- EC modulated fan technology
- Integral condensate and leak management
- One or two racks cooling option
- Sophisticated controller including online connection
- Simple representation of redundancies



LCP Inline DX

- 12 kW
- EC modulated fan technology
- Integral condensate and leak management
- Cooling of several racks
- Sophisticated controller including online connection
- Simple representation of redundancies



LCP Rack CW

- 10-55 kW
- EC modulated fan technology
- Integral condensate and leak management
- One or Two racks cooling option
- Sophisticated controller including online connection
- Simple representation of redundancies

LCP Inline CW

- 10-55 kW
- EC modulated fan technology
- Integral condensate and leak management
- Cooling of several racks
- Sophisticated controller including online connection
- Set-forward and flush variants

Chillers for IT Cooling

- IP 55
- 15-481 kW
- Redundant speed-controlled pumps
- Controller with networking capability with the SNMP protocol
- Optional free cooling
- Optional pump and tank



SOFTWARE & INTERFACE


Therm Software

- Enclosure heat load calculation
- Enclosure climate control configuration
- Chiller configuration
- IT cooling configuration



RiDiag Software

- Operation and monitoring
- Analysis, parametrisation and diagnosis
- For TopTherm and Blue e+ cooling units and chillers
- 2 years historical data

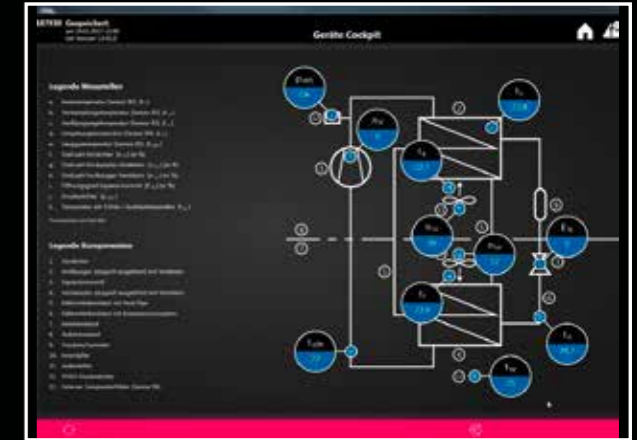

IoT Interface

- Incorporation of Blue e+ cooling units into the IoT platform
- Transmission of equipment data to the cloud
- Status monitoring and maintenance information
- Visualising equipment status



SERVICE

To support your business Rittal delivers comprehensive service support throughout the world for our range of cooling products.

- Service centres across ANZ
- Qualified technicians
- 24 hour availability
- Service and efficiency checks
- Service contracts
- Repairs and maintenance
- Extended warranty



Rittal – The System.

Faster – better – everywhere.

- Enclosures
- Power Distribution
- Climate Control
- IT Infrastructure
- Software & Services

AUSTRALIA

Customer Service

T 1800 350 665

E customerservice@rittal.com.au

Service

T 1800 676 169

E service@rittal.com.au

W rittal.com.au

rittaldatacentre.com.au

NEW ZEALAND

Customer Service

T 0800 748 825

E sales@rittal.co.nz

Service

T 0800 748 737

E service@rittal.co.nz

W rittal.co.nz

rittaldatacentre.co.nz

MELBOURNE

Ph: (03) 8514 3500

Fax: (03) 8514 3510

SYDNEY

Ph: (02) 8898 6200

Fax: (02) 8898 6202

BRISBANE

Ph: (07) 3899 1322

Fax: (07) 3899 1422

ADELAIDE

Ph: (08) 8111 5100

Fax: (08) 8111 5105

PERTH

Ph: (08) 9249 9155

Fax: (08) 9249 9418



apsindustrial.com.au

Sales: 1300 309 303

Sales Fax: 1300 309 308

CONNECT WITH US



ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

