

INDUSTRIAL
MARKING SYSTEMS


CONTENTS

| | | | |
|-----------------------------------|-----------|----------------------------|-----------|
| WIRE MARKERS | 4 | MARKER SLEEVES | 17 |
| PA- / PAZ Single characters | 4 | PM | 17 |
| PA+ / PAZ Multi characters | 4 | PTC | 17 |
| PC Single characters | 5 | PT+ / PTZ / PTM | 18 |
| PC / PCZ Multi characters | 5 | INSERTS FOR SLEEVES | 19 |
| PCT Multi characters | 6 | PP+ | 19 |
| PO / POZ Multi characters | 7 | PFC | 19 |
| PHZ / PHZF Multi characters | 8 | PF | 20 |
| CABLE MARKERS | 9 | PRINTERS | 21 |
| PK+ / PKZ Single characters | 9 | PROMARK T-2000 | 21 |
| PK-20Q / PKZ20Q Multi characters | 9 | PRIMACY | 21 |
| PO-068 / PKZ20 Multi characters | 10 | PRINTER SOFTWARE | 21 |
| PO-068Q / PO-06Q Multi characters | 10 | Promark Creator | 21 |
| PPQ / PPQZ Multi characters | 11 | ACCESSORIES | 22 |
| ACM Multi characters | 11 | Cable ties | 22 |
| PKS Single characters | 12 | Stainless steel cable tie | 22 |
| PKS Multi characters | 12 | Edge clip / Cable tie | 22 |
| HOLDER | 13 | PAD | 22 |
| PKS holder | 13 | Compartment Boxes | 22 |
| PKH/POH holder | 13 | MD / MDH | 23 |
| PROSLEEVE | 14 | CAS / PAM | 23 |
| Cable markers | 14 | PACKAGING | 23 |
| Panel labels | 14 | | |
| Heat shrink tube | 14 | | |
| COMPONENT MARKERS | 15 | | |
| PPA+ / PPAZ | 15 | | |
| PFA | 15 | | |
| PLL / PLT / PLB / PLD | 16 | | |
| PLTC | 16 | | |

HIGH-QUALITY INDUSTRIAL MARKING SOLUTIONS FOR A SAFER ELECTRIC FUTURE


OUR MARKING METHODS

Closed and adjustable sleeve marker for not yet connected cables. Unique profile with spring effect bellows, which covers a large diameter range. Rotage protection by using a angular cut prevents twisting between adjacent sleeves.



Single characters

Comprising individual character markers that can be combined to provide total marking flexibility.



Multi characters

Enabling you to easily obtain markers pre-printed with complete information, precisely tailored to your specifications.



Do-it-yourself

Empowering you to create your own markers on-site with full control over the process.



Symbol means the item is transparent and has no colour



Symbol means the item is stainless steel

INTERNATIONAL COLOR CODE



Black marker (RAL9011) white print



Brown marker (RAL8015) white print



Red marker (RAL3018) white print



Orange marker (RAL2004) black print



Yellow marker (RAL1021) black print



Green marker (RAL6001) white print



Blue marker (RAL5010) white print



Violet marker (RAL7005) white print



Grey marker (RAL9010) white print



White marker (RAL9011) black print



Red marker white print



Blue marker white print



WIRE MARKERS

PA- / PAZ Single characters

Closed and adjustable sleeve marker for not yet connected cables. Unique profile with spring effect bellows, which covers a large diameter range. Rotage protection by using a angular cut prevents twisting between adjacent sleeves.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------------------|-------------------|
| PA- | PVC | -30°C to +60°C |
| PAZ | ZEREX (halogen free) | -30°C to +90°C |

Sizes and packaging:

| TYPE | Ø [MM] | AREA* [MM ²] | LENGHT [MM] | NUMBER OF CHARACTERS | MARKER HEIGHT [MM] | MARKER WIDTH [MM] | TEXT HEIGHT [MM] | STRIP PACK CUT/ LOOSE MARKERS [PCS] | SINGLE BAG MARKER STRIPS [PCS] | REEL SEMI CUT MARKERS [PCS] | COMPACT DISC SEMI CUT MARKERS [PCS] |
|--------------|------------|--------------------------|-------------|----------------------|--------------------|-------------------|------------------|-------------------------------------|--------------------------------|-----------------------------|-------------------------------------|
| PA-02/PAZ+02 | 1.3 - 3.0 | ~0.2 - 1.5 | 3 | 1 | 3.6 | 3.5 | 2.6 | 5 x 200 | 250 | 1000 | 500 |
| PA-1/PAZ+1 | 2.5 - 5.0 | ~1.5 - 4.0 | 3 | 1 | 5.5 | 4.2 | 2.6 | 5 x 200 | 250 | 1000 | 500 |
| PA-2/PAZ+2 | 4.0 - 10.0 | ~2.5 - 16.0 | 4 | 1 | 9.5 | 6.6 | 4.0 | 5 x 100 | 250 | - | 250 |
| PA-3/PAZ3 | 8.0 - 16.0 | ~16.0 - 70.0 | 6 | 1 | 16.5 | 11.0 | 4.0 | 5 x 20 | - | - | - |

Colours:



Marking methods:



Related Products:



CAS



MD/ MDH



PAD



Compartment box

PA+ / PAZ Multi characters

Closed profile marker for unconnected wires and cables. The unique design enables one marker size to be used with a wide variety of diameters of wire.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------------------|-------------------|
| PA+ | PVC | -30°C to +60°C |
| PAZ | ZEREX (halogen free) | -30°C to +90°C |


Sizes and packaging:

| TYPE | Ø [MM] | AREA* [MM ²] | LENGHT [MM] | NUMBER OF CHARACTERS |
|--------------|------------|--------------------------|-------------|----------------------|
| PA+02/PAZ+02 | 1.3 - 3.0 | ~0.2 - 1.5 | 9 - 48 | 1 - 30 |
| PA+05/PAZ+05 | 2.0 - 4.0 | 0.5 - 2.5 | 9 - 48 | 1 - 30 |
| PA+1/PAZ+1 | 2.5 - 5.0 | 0.75 - 4.0 | 9 - 48 | 1 - 30 |
| PA+2/PAZ+2 | 4.0 - 10.0 | 2.5 - 10.0 | 9 - 48 | 1 - 30 |
| PA-3/PAZ3 | 8.0 - 16.0 | 16.0 - 70.0 | 9 - 48 | 1 - 30 |

Colours:



Marking methods:



Related Products:



MK500



SP8600

PC Single characters

Open single markers for already connected wires. Fast snap-on installation securely positioned with help of barbs. Twist-protected for secure combination marking.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------|-------------------|
| PC | PVC | -30°C to +60°C |

Sizes and packaging:

| TYPE | Ø [MM] | AREA* [MM2] | LENGHT [MM] | NUMBER OF CHARACTERS | MARKER HEIGHT [MM] | MARKER WIDTH [MM] | TEXT HEIGHT [MM] | STRIP PACK CUT/ LOOSE MARKERS [PCS] |
|-------|-----------|-------------|-------------|----------------------|--------------------|-------------------|------------------|-------------------------------------|
| PC-10 | 2.4 - 3.0 | ~0.4 - 1.5 | 3 | 1 | 3.6 | 3.7 | 2.6 | 5 x 200 |
| PC-20 | 3.0 - 4.0 | ~1.5 - 3.0 | 3 | 1 | 4.2 | 4.5 | 2.6 | 5 x 200 |
| PC-30 | 4.0 - 5.0 | ~3.0 - 4.0 | 3 | 1 | 9.5 | 5.7 | 2.6 | 5 x 200 |
| PC-40 | 5.0 - 6.2 | ~4.0 - 5.0 | 4 | 1 | 16.5 | 6.9 | 4.0 | 5 x 200 |

Colours:



Marking methods:



Related Products:



Compartment box

PC / PCZ Multi characters

Open Customised wire marker for already connected wires. Enables fast snap-on installation. Securely positioned with help of barbs.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------------------|-------------------|
| PC | PVC | -30°C to +60°C |
| PCZ | ZEREX (halogen free) | -30°C to +90°C |


Sizes and packaging:

| TYPE | Ø [MM] | AREA* [MM2] | LENGHT [MM] | NUMBER OF CHARACTERS |
|-------------|-----------|-------------|-------------|----------------------|
| PC-10/PCZ10 | 2.4 - 3.0 | 0.5 - 1.5 | 9 - 100 | 1 - 30 |
| PC-20/PCZ20 | 3.0 - 4.0 | 1.5 - 2.5 | 9 - 100 | 1 - 30 |
| PC-30/PCZ30 | 4.0 - 5.0 | 2.5 - 4.0 | 9 - 100 | 1 - 30 |
| PC-40/PCZ40 | 5.0 - 6.2 | 4.0 - 6.0 | 9 - 100 | 1 - 30 |
| PC-50 | 6.0 - 7.2 | ~10.0 | - | 1 - 30 |

Colours:



Marking methods:



Related Products:



MK500

PCT Multi characters


Open wire marker, for already connected wires, for print on thermal transfer printers. An unique design of the marker makes it easy to mount even on bent wires. Securely positioned with help of barbs.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|--|-------------------|
| PCT | Halogen-free, cadmium and silicone-free Marker base: ABS Text field: ZEREX (halogen free) | -40°C to +90°C |

Sizes and packaging:


| TYPE | HEIGHT H [MM] | WIDTH W1 [MM] | WIDTH W2 [MM] | WIDTH W3 [MM] |
|--------|---------------|---------------|---------------|---------------|
| PCT 10 | 3.6 | 3.5 | 3.9 | 3.8 |
| PCT 20 | 4.0 | 4.5 | 3.9 | 4.8 |
| PCT 30 | 4.9 | 5.0 | 3.9 | 5.3 |
| PCT 40 | 4.8 | 5.7 | 3.8 | 5.9 |
| PC-50 | 6.0 - 7.2 | ~10.0 | - | 1 - 30 |



Colours:




Marking methods:



Related Products:



MK10-EOS2 MK10-EOS5

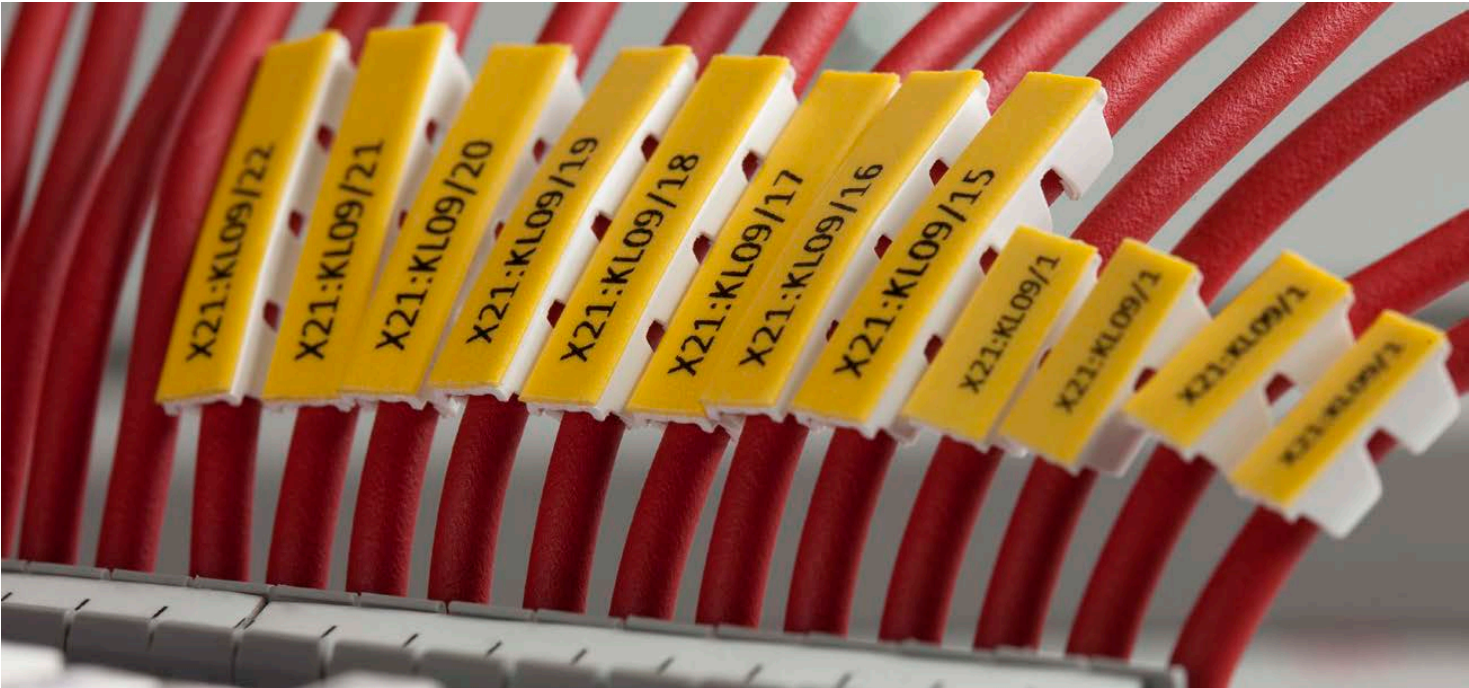

PO / POZ Multi characters

Oval marking profile with built in spring action that retains sleeve shape with excellent grip. Designed for the most popular sizes of wires and cables.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------------------|-------------------|
| PO | PVC | -30°C to +60°C |
| POZ | ZEREX (halogen free) | -30°C to +90°C |


Sizes and packaging:

| TYPE | Ø [MM] MIN/MAX | AREA* [MM2] | COMPACT DISC [M] | DN-REEL [M] | BN-REEL [M] | BOX PO [M] | BOX POZ [M] |
|-----------|----------------|-------------|------------------|-------------|-------------|------------|-------------|
| PO/POZ-01 | 1.3 / 1.8 | ~0.25 | 6.0 | 60 | 250 | - | 250 |
| PO/POZ-02 | 1.7 / 2.2 | ~0.5 | 5.0 | 60 | 250 | - | 250 |
| PO/POZ-03 | 2.0 / 2.5 | ~0.75 | 4.5 | 50 | 250 | - | 250 |
| PO/POZ-04 | 2.2 / 2.8 | ~1.0 | 4.5 | 50 | 200 | - | 200 |
| PO/POZ-05 | 2.7 / 3.5 | ~1.5 | 4.0 | 40 | 200 | - | 200 |
| PO/POZ-06 | 3.2 / 4.0 | ~2.5 | 3.5 | 40 | 200 | - | 200 |
| PO-06Q10* | - | - | 3.5 | 40 | 100 | - | - |
| P0-068TW | 6.8 / 7.0 | - | 4.5 | 25 | 100 | - | - |
| P0-068Q* | - | - | - | 25 | 50 | - | - |
| PO/POZ-07 | 3.8 / 4.7 | ~4.0 | 3.5 | 30 | 100 | - | 100 |
| PO/POZ-08 | 4.6 / 5.5 | ~6.0 | - | 30 | 100 | - | 100 |
| PO/POZ-09 | 5.6 / 7.0 | ~10.0 | - | - | 50 | - | 50 |
| PO/POZ-10 | 6.5 / 8.0 | ~16.0 | - | - | 50 | - | 50 |
| PO/POZ-11 | 7.0 / 9.5 | ~18.0 | - | - | - | 5 x 10 | 5 x 10 |
| PO/POZ-12 | 7.5 / 10.0 | ~20.0 | - | - | - | 5 x 10 | 5 x 10 |
| PO/POZ-14 | 9.5 / 12.0 | ~25.0 | - | - | - | 5 x 10 | 5 x 10 |
| PO/POZ-16 | 11.5 / 14.0 | ~35.0 | - | - | - | 2 x 5 | 2 x 5 |
| PO/POZ-18 | 13.5 / 16.0 | ~50.0 | - | - | - | 2 x 5 | 2 x 5 |
| PO/POZ-20 | 15.5 / 18.0 | ~70.0 | - | - | - | 2 x 5 | 2 x 5 |
| PO/POZ-22 | 17.5 / 20.0 | ~95.0 | - | - | - | 2 x 5 | 2 x 5 |
| PO/POZ-24 | 19.5 / 22.0 | ~120.0 | - | - | - | 2 x 5 | 2 x 5 |
| PO/POZ-26 | 21.5 / 24.0 | ~150.0 | - | - | - | 2 x 5 | 2 x 5 |
| PO/POZ-28 | 24.0 / 28.0 | ~185.0 | - | - | - | 2 x 5 | 2 x 5 |

Colours:



Marking methods:



Related Products:



PROMARK
printers



EOS and
MK10 printers



SP8600

PHZ / PHZF Multi characters

A flexible halogen free heat-shrinkabel profile with excellent properties on fire safety characteristics. Low smoke generation and evolution of acid gases.

Shrink ratio 2:1. PHZ = round profile. PHZF=flat profile.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------------|----------------------------------|--|
| PHZ / PHZF | Flexible halogen free polyolefin | -55°C to +105°C Shrinkage temperature > 90°C |


Sizes and packaging:

| TYPE | Ø, BEFORE [MM] | Ø, SHRINKED [MM] | Ø, BEFORE [INCH] | Ø, SHRINKED [INCH] | PHZ REEL [M] | PHZF REEL [M] |
|-----------------|----------------|------------------|------------------|--------------------|--------------|---------------|
| PHZ / PHZF20024 | 2.4 | 1.2 | 3 / 32 | 3 / 64 | 25 / 150 | 25 / 100 |
| PHZ / PHZF20032 | 3.2 | 1.6 | 1 / 8 | 1 / 16 | 25 / 150 | 25 / 100 |
| PHZ / PHZF20048 | 4.8 | 2.4 | 3 / 16 | 3 / 32 | 25 / 150 | 25 / 100 |
| PHZ / PHZF20064 | 6.4 | 3.2 | 1 / 4 | 1 / 8 | 25 / 150 | 25 / 100 |
| PHZ / PHZF20095 | 9.5 | 4.7 | 3 / 8 | 3 / 16 | 150 | 100 |
| PHZ / PHZF20127 | 12.7 | 6.4 | 1 / 2 | 1 / 4 | 150 | 100 |
| PHZ / PHZF20190 | 19.1 | 9.5 | 3 / 4 | 3 / 8 | 50 | 50 |
| PHZ / PHZF20254 | 25.4 | 12.7 | 1 | 1 / 2 | 50 | 50 |
| PHZ / PHZF20381 | 38.1 | 19.1 | 1.1 / 2 | 3 / 4 | 25 | 25 |
| PHZ20510 | 50.8 | 25.4 | 2 | 1 | 25 | - |
| PHZF20504 | 50.4 | 25.2 | 2 | 1 | - | 25 |

Colours:



Marking methods:



Related Products:



PROMARK
printers



EOS and
MK10 printers



CABLE MARKERS

PK+ / PKZ Single characters

Combination marker for cable and pipe marking. One size for all diameters.

Installed quickly onto Partex PKH or POH holder which is fastened with cable ties around the cable.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------------------|-------------------|
| PK+ | PVC | -30°C to +60°C |
| PKZ | ZEREX (halogen free) | -30°C to +90°C |

Sizes and packaging:

| TYPE | MARKER LENGTH [MM] SEMI CUT MARKERS [PCS] | MARKER HEIGHT [MM] | MARKER WIDTH [MM] | NO OF CHARACTERS | TEXT HEIGHT [MM] | STRIP PACK CUT / LOOSE MARKERS [PCS] | COMPACT DISC SEMI CUT MARKERS [PCS] |
|------|--|--------------------|-------------------|------------------|------------------|--------------------------------------|-------------------------------------|
| PKZ | 6 | 4.3 | 11.3 | 1 | 3.2 | 5 x 100 | 500 |
| PK+ | 4 | 4.3 | 11.3 | 1 | 4.0 | 5 x 100 | 500 |

Colours:



Marking methods:



Related Products:



POH holder

PKH holder

Cable Ties

Compartment box

PK-20Q / PKZ20Q Multi characters

Customised cable marker with pre-punched holes, easy mounted with cable ties.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|--------|----------------------|-------------------|
| PK-20Q | PVC | -30°C to +60°C |
| PKZ20Q | ZEREX (halogen free) | -30°C to +90°C |

Customised marker


| TYPE PVC | TYPE ZEREX | LENGTH [MM] | MAX QTY CHARACTER | PUNCHED HOLES |
|-----------|------------|-------------|-------------------|---------------|
| PK-20Q18 | | 18 | 7 | both ends |
| PK-20Q25 | PKZ20Q25 | 25 | 12 | in center |
| PK-20Q40 | PKZ20Q40 | 40 | 21 | both ends |
| PK-20Q60 | | 60 | 42 | both ends |
| PK-20Q80 | | 80 | 60 | both ends |
| PK-20Q100 | | 100 | 82 | both ends |

| TYPE PVC | DESCRIPTION | DN/BN REEL [M] |
|-----------|---|----------------|
| PKZ20Q10* | PKZ 2 profile ZEREX, 10mm between punched holes | 20 (DN) |
| PK-20Q10 | PKZ 2 profile, 10mm between punched holes | 100 (BN) |

Colours:



Marking methods:



Related Products:



PROMARK printers*

EOS and MK10 printers*

Cable Ties

*= Only PKZ20Q10 is printable with EOS, MK10 and Promark printers

PO-068 / PKZ20 Multi characters

Oval marking profile designed for mounting on POH or PKH holders fixed with cable ties on cable.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|--------|----------------------|-------------------|
| PO-068 | Soft PVC | -30°C to +60°C |
| PKZ20 | ZEREX (halogen free) | -30°C to +90°C |


Sizes and packaging:

| TYPE | Ø [MM] MIN/MAX | COMPACT DISC [M] | DN-REEL [M] | BN-REEL [M] | KN-BOX [M] |
|----------|----------------|------------------|-------------|-------------|------------|
| PO-068TW | 6.8 / 7.0 | 4.5 | 25 | 100 | - |
| PKZ20 | 6.8 / 7.0 | - | 20 | - | 2 x 100 |

Colours:



Marking methods:



Related Products:



PROMARK
printers



EOS and MK10
printers



Cable Ties



POH holder



PKH holder

PO-068Q / PO-06Q Multi characters

Pre-punched profile, with 10 mm hole spacing. The marker is easily and quickly mounted, with cable ties, to any size of cable. PO-068Q has width 11.4 mm and PO-06Q has width 7,9 mm.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|---------|----------|-------------------|
| PO-068Q | PVC | -30°C to +60°C |
| PO-06Q | PVC | -30°C to +60°C |


Sizes and packaging:

| TYPE | COMPACT DISC [M] | DN-REEL [M] | BN-REEL [M] |
|----------|------------------|-------------|-------------|
| PO-06Q10 | 3.5 | 40 | 100 |
| PO-068Q | | 25 | 50 |

Colours:



Marking methods:



Related Products:



PROMARK
printers



EOS and MK10
printers



Cable Ties

PPQ / PPQZ Multi characters

Flat cable marker with pre-punched holes for mounting on the cable with cable ties. The elastic material ensures that the marker is firmly attached to the cable.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------------------|-------------------|
| PPQ | Soft PVC | -20°C to +60°C |
| PPQZ | ZEREX (halogen free) | -55°C to +105°C |

Sizes and packaging:


| TYPE | WIDTH [MM] | LENGTH [MM] | ROLL [PCS] |
|------------|------------|-------------|------------|
| PPQ+10040 | 10 | 40 | 500 |
| PPQ+10060 | 10 | 60 | 330 |
| PPQ+10080 | 10 | 80 | 250 |
| PPQ+10100 | 10 | 100 | 200 |
| PPQ+19040 | 19 | 40 | 500 |
| PPQ+19060 | 19 | 60 | 330 |
| PPQ+19080 | 19 | 80 | 250 |
| PPQ+38060 | 38 | 60 | 330 |
| PPQ+38080 | 38 | 80 | 250 |
| PPQ+38100 | 38 | 100 | 200 |
| PPQ+50080 | 50 | 80 | 250 |
| PPQ+50100 | 50 | 100 | 200 |
| PPQ+06010* | 10 | 60 | 1000 |

*= Ladder style

Colours:



Marking methods:



Related Products:



EOS and MK10 printers



Cable Ties

ACM Multi characters

A cost-effective and easy way to make cable markers. You only need a standard laser printer. Accurate, laser-cut, perforations make it easy to remove printed labels. The marker is easily and quickly mounted, with cable ties, to any size of cable.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|-----------|-------------------|
| ACM | Polyester | -40°C to +85°C |

Sizes and packaging:

| ARTICLE NO | DESCRIPTION | LABEL SIZE WxH [MM] | LABELS/SHEET [PCS] | SHEETS/PACK [PCS] | LABELS/PACK [PCS] |
|------------|------------------------|---------------------|--------------------|-------------------|-------------------|
| ACM1360 | A4 sheet, cable marker | 60 x 13 | 60 | 10 | 600 |
| ACM1390 | A4 sheet, cable marker | 90 x 13 | 40 | 10 | 400 |
| ACM2090 | A4 sheet, cable marker | 90 x 20 | 24 | 10 | 240 |

Colours:



Marking methods:



Related Products:



Cable Ties

PKS Single characters

Acid resistant heavy duty stainless steel single character markers. Markers are fitted on to stainless steel carrier strip and mounted to the cable with ties. Carriers are available with slots or with holes.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|--------------------------|--------------------|
| PKS | AISI 316 stainless steel | Extreme conditions |

Sizes and packaging:

| TYPE | DESCRIPTION | LENGTH X WIDHT [MM] | SLOT/HOLE WIDTH [MM] | MAX NUMBER OF SINGLE CHARACTERS | PACKAGING [PCS/BAG] |
|--------------|----------------------|---------------------|----------------------|---------------------------------|---------------------|
| PKS10040 | Holder | 10.3 x 47.0 | 4.8 | 6 | 50 |
| PKS10060 | Holder | 10.3 x 65.0 | 4.8 | 9 | 50 |
| PKS10080 | Holder | 10.3 x 87.0 | 4.8 | 13 | 50 |
| PKS10100 | Holder | 10.3 x 109.0 | 4.8 | 17 | 50 |
| PKS10120 | Holder | 10.3 x 128.0 | 4.8 | 20 | 50 |
| PKS10150 | Holder | 10.3 x 158.0 | 4.8 | 24 | 50 |
| PKS10006PP.# | Strips of characters | - | - | - | 50 |

= A-Z, 0-9 etc.

Colours:



Marking methods:



Related Products:



Stainless Cable Ties



Tools



Compartment box

PKS Multi characters

Acid resistant heavy duty stainless steel single character markers. Markers are fitted on to stainless steel carrier strip and mounted to the cable with ties.

Carriers are available with slots or with holes.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|--------------------------|--------------------|
| PKS | AISI 316 stainless steel | Extreme conditions |

Sizes and packaging:

| TYPE | HEIGHT [MM] | LENGTH [MM] | SLOT WIDTH [MM] | NUMBER OF FITTINGS | TEXT HEIGHT | MAX NO OF LINES * |
|-------|-------------|---|-----------------|--------------------|-------------|-------------------|
| PKS10 | 10 | 50, 70, 90, 110, 130, 150, 170, 190, 200, 220 | 4.8 | single 2 x 1 | 3.8 / 6.0 | 2 |
| PKS19 | 19 | 50, 70, 90, 110, 130 | 4.8 | single 2 x 1 | 3.8 / 6.0 | 3 |
| PKS25 | 25.4 | 50, 70, 90, 110, 130 | 4.8 | single 2 x 1 | 3.8 / 6.0 | 4 |
| PKS32 | 32 | 50, 70, 90, 110, 130 | 4.8 | double 2 x 2 | 3.8 / 6.0 | 4 |
| PKS38 | 38 | 50, 70, 90, 110, 130 | 4.8 | double 2 x 2 | 3.8 / 6.0 | 4 |

* depending on the font size

Colours:



Marking methods:



Related Products:



Stainless Cable Ties



Tools



HOLDER

PKS holder

Stainless steel holders for single character markers. Available with slits and holes.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|--------------------------|--------------------|
| PKS | AISI 316 stainless steel | Extreme conditions |

Sizes and packaging:

| TYPE | DESCRIPTION | WIDTH X LENGTH [MM] | SLIT / HOLE WIDTH [MM] | MAX NUMBER OF SINGLE CHARACTERS | PACKAGING [PCS/BAG] |
|----------|-------------|---------------------|------------------------|---------------------------------|---------------------|
| PKS10040 | Holder | 10.3 x 47.0 | 4.8 | 6 | 50 |
| PKS10060 | Holder | 10.3 x 65.0 | 4.8 | 9 | 50 |
| PKS10080 | Holder | 10.3 x 87.0 | 4.8 | 13 | 50 |
| PKS10100 | Holder | 10.3 x 109.0 | 4.8 | 17 | 50 |
| PKS10120 | Holder | 10.3 x 128.0 | 4.8 | 20 | 50 |
| PKS10150 | Holder | 10.3 x 158 | 4.8 | 24 | 50 |

Colours:



Related Products:



Cable Ties Single markers

PKH/POH holder

Holders for PK+/PKZ and PO/POZ markers easily mounted with cable ties to fit any size of cable.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------------------|-----------|-------------------|
| PKH, POH | PVC | -20°C to +60°C |
| PKH POL, POH POL | Polyamide | -20°C to +60°C |

Sizes and packaging:

| TYPE | WIDTH X LENGTH [MM] | MAX NUMBER PK+ | MAX NUMBER PKZ 2/6 | PACKAGING [PCS/BAG] |
|--------------|---------------------|----------------|--------------------|---------------------|
| PKH070 | 9.0 x 70 | 10 | 7 | 100 |
| PKH070POL* | 9.8 x 70 | 10 | 7 | 100 |
| PKH110POL* | 9.0 x 100 | 20 | 13 | 100 |
| POH07060^ | 8.3 x 60 | 7 | 5 | 100 |
| POH07060POL* | 8.0 x 60 | 7 | 5 | 100 |
| POH12082^ | 8.3 x 82 | 12 | 9 | 100 |
| POH12082POL* | 8.0 x 82 | 12 | 9 | 100 |
| POH18110 | 8.3 x 110 | 18 | 13 | 100 |
| POH30152 | 8.3 x 152 | 29 | 20 | 100 |

*Made in outdoor halogen free, black Polyamide 6.6. The other holders are made in hard PVC

^Available in red, yellow, green, blue and white.

Related products:



Cable Ties

PROSLEEVE

ProSleeve

Series of high-specification heat shrink, cable marker and panel label system in ladder format. Developed to meet a specific demand; such as fire safety, high temperature, military standards, etc.



Cable markers

| TYPE | DESCRIPTION |
|------|---|
| CMC | ZERO HALOGEN. Cable marker made of zero halogen, crosslinked UV stabilized polyolefin with low toxicity. |
| CML* | EXTENDED FIRE SPECIFICATION. Cable marker made of zero halogen, crosslinked UV stabilized polyolefin with low toxicity. London underground approved. |
| CMT* | EXTREME TEMPERATURE. High temperature rated, flexible, highly flame retardant, polyvinylidene fluoride printable cable markers. Excellent chemical and mechanical properties. |
| CMD* | DIESEL SPECIFICATION. CMD meets printing and fluid resistance standards of SNCF NF F 00-608 type H, SAE-AS5942, as well as MIL-STD-202.Method 215K and SAE-AMS-DTL-23053-6 class 1 standards. |
| CMM* | MILITARY GRADE. CMM meets printing and fluid resistance standards of NF F 00-608 type H, SAEAS5942, as well as MIL-STD-202 Method 215K and SAE-AMS-DTL-23053-6 class 1 standards. |

*= On request.

Panel labels

| TYPE | DESCRIPTION |
|------|--|
| EPL | ENHANCED PANEL LABELS. Innovative labels specifically designed to replace engraved and plotted plates. |
| EPF* | ENHANCED PANEL LABELS LOW FIRE HAZARD. EPF is made of low fire hazard zero halogen, self-extinguishing, crosslinked UV stabilized polyolefin with low toxicity. It is used mostly for mass transit and underground applications. |

*= On request.

Heat shrink tube


| TYPE | DESCRIPTION |
|------|---|
| SG | STANDARD GRADE. Flame retardant UL224 VW-1 Flammability. Self-extinguishing. Shrink Ratio 2:1. |
| HZ | HALOGEN FREE. Low smoke, flame retardant heat shrinkable tubing. Shrink Ratio 2:1. |
| MG* | MILITARY SPECIFICATION. Very flexible, high temperature rated, highly flame retardant, UL and CSA recognised heat shrinkable tubing. Shrink Ratio 3:1. |
| NF* | NF DIESEL SPECIFICATION. Diesel resistant sleeve meet the material and physical property requirements of SEA-AMS- DTL-23053-6 Class 1. Shrink Ratio 3:1. |
| ET* | EXTREME TEMPERATURE PERFORMANCE. High temperature rated, flexible, highly flame retardant, polyvinylidene fluoride printable sleeves. Excellent chemical and mechanical properties with low friction surface. Shrink Ratio 2:1. |
| EF* | EXTENDED FIRE SPECIFICATION. Flame retardant, zero halogen, low smoke, low toxicity cross linked UV stabilised and printable polyolefin. Meets London Underground Limited Standard 1-085. Shrink Ratio 2:1. |

*= On request.

Colours:



Marking methods:



Related products:



EOS and MK10
printers



Cable Ties

COMPONENT MARKERS

PPA+ / PPAZ

Flat, hard profile with an adhesive tape backing. The thick layer of adhesive ensures a strong grip on uneven surfaces (e.g. powder-painted cabinet).



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------------------|-------------------|
| PPA+ | PVC | -20°C to 60°C |
| PPAZ | ZEREX (halogen free) | -30°C to 90°C |


Sizes and packaging:

| TYPE | DESCRIPTION | COMPACT DISC WIDTH [MM] | COMPACT DISC LENGTH [M] | DN-REEL LENGTH [M] |
|--------------|-----------------------------------|-------------------------|-------------------------|--------------------|
| PPA+profile | Flat hard profile, adhesive | 9.0 | 10 | 25 |
| PPAZ profile | Flat hard ZEREX profile, adhesive | 9.0 | 6 | 20 |

Colours:



Marking methods:



Related products:



PROMARK
printers



EOS and MK10
printers

PFA

Self-adhesive label material for direct marking in cabinets and on components. Label modules pre-punched in standardized 17.5 mm units. Very durable and environment resistant printout by laser printer.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|--|-------------------|
| PFA | Halogen free self-adhesive polyester foil, specially pre-processed for printing. | -30°C to +120°C |



Sizes and packaging:

| TYPE | HEIGHT [MM] | LENGTH [MM] | NUMBER OF LABELS (ROW X COLUMNS) [PCS] | NUMBER OF 12" SHEETS / PACKS [PCS] | NUMBER OF LABELS / PACKS [PCS] |
|------------|-------------|-------------|--|------------------------------------|--------------------------------|
| PFA20018KT | 9.5 | 17.5 | 10 ark x 32 x 11 | 10 | 3520 |

Colours:



Marking methods:

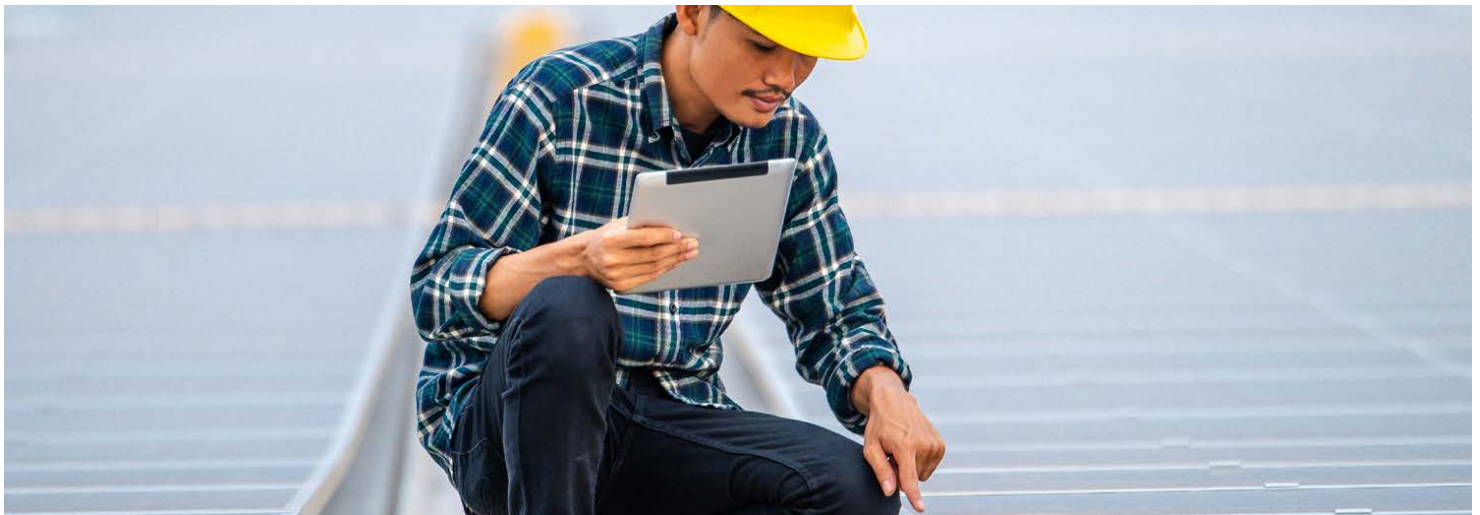

PLL / PLT / PLB / PLD

Labels for cable and component marking. Pre-printed labels with symbols, numbers or letters. Empty labels for print in thermal transfer printers or laser printers. A wide range of materials.




Sizes and packaging:

| TYPE | DESCRIPTION |
|-----------|--|
| PLL | Adhesive labels in polyester for laser printer. Colours: Yellow, white, silver. |
| PLT | Adhesive labels in polyester on roll for thermal transfer printer. Colours: Yellow, white, silver. |
| PLB / PLC | Pre-printed labels with standard symbols, numbers and letters. Colours: Yellow. |
| PLD | Dispenser with pre-printed labels (rolls). Colours: Yellow, white. |

Colours:



Marking methods:



Related products:



EOS and MK10
printers

PLTC

A soft and flexible printable universal tape, for indoor and outdoor use. Excellent resistance to moisture, alcohols and oil.

| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|----------|-------------------|
| PLTC | Vinyl | -40°C to +80°C |



Sizes and packaging:

| TYPE | DESCRIPTION | HEIGHT [MM] | ROLL [M] |
|----------------|-----------------|-------------|----------|
| PLTC009000D*VR | Tape, removable | 9 | 100 |
| PLTC009000D*VP | Tape, permanent | 9 | 100 |
| PLTC012000D*VP | Tape, permanent | 12 | 100 |
| PLTC025000D*VP | Tape, permanent | 25 | 60 |
| PLTC050000D*VP | Tape, permanent | 50 | 30 |
| PLTC100000D*VP | Tape, permanent | 100 | 30 |

* = color code.

Colours:



Marking methods:



Related products:



EOS and MK10
printers

MARKER SLEEVES

PM

Transparent holder used to mark cables with PF labels, PFC cards or a PP+ profile. Fitting and fastening with cable ties.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|--|-------------------|
| PM | Cadmium and silicon free soft PVC according to Partex formula. | -30°C to +60°C |

Sizes and packaging:

| TYPE | Punched Profile | LENGTH | WIDTH [MM] | WIDTH OF PUNCHED HOLE [MM] | PACKAGING |
|--------|-----------------|-----------------|------------|----------------------------|---------------------------------------|
| PM-10 | No | 33 mm | 6.0 | 3.0 | 100 pcs |
| PM-20 | No | 33 / 45 / 66 mm | 11.3 | 3.0 | 100 / 50 pcs depending on marker size |
| PM-24 | No | 33 / 66 mm | 13.9 | 3.9 | 100 / 50 pcs depending on marker size |
| PM-20Q | Yes | 20 m | 11.3 | 3.0 | DN reel |
| PM-24Q | Yes | 20 m | 13.9 | 3.9 | DN reel |
| PM-20 | No | 20 m | 11.3 | - | DN reel |

Colours:



Related products:



PP+



PFC



PF



Cable Ties

PTC

Open marker with a transparent label pocket for snap on mounting onto already connected cables and wires.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|---|-------------------|
| PTC | Cadmium and silicon free rigid PVC in the sleeve body and soft PVC in the transparent pocket according to Partex formula. | -40°C to +60°C |

Sizes and packaging:

| TYPE | Pocket width [mm] | Ø [MM] | AREA* [MM2] | LENGTHS [MM] | LOOSE, CUT SLEEVE IN BAG [PCS] |
|-------|-------------------|-----------|-------------|--------------|--------------------------------|
| PTC10 | 4.6 | 2.4 - 3.0 | ~0.4 - 1.5 | 15 / 21 / 30 | 200 |
| PTC20 | 4.6 | 3.0 - 4.0 | ~1.5 - 3.0 | 15 / 21 / 30 | 200 |
| PTC30 | 4.6 | 4.0 - 5.0 | ~3.0 - 4.0 | 15 / 21 / 30 | 200 |
| PTC40 | 4.6 | 5.0 - 6.2 | ~4.0 - 5.0 | 15 / 21 / 30 | 100 |
| PTC50 | 4.6 | 6.2 - 7.2 | ~5.0 - 6.0 | 15 / 21 / 30 | 100 |

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Related products:



PP+



PFC



PF



PT+ / PTZ / PTM

| | |
|--------|---|
| PT+ | Transparent sleeve with pocket for marking labels. |
| PT+PFC | Transparent sleeve with pocket for PFC marking labels. |
| PTZ+ | Halogen free coloured sleeve with transparent pocket for marking labels. |
| PTM | Transparent sleeve with wings for easy mounting on cables or wires by using cable ties. |

Sizes and packaging:

PT+ Transparent sleeve with transparent pocket

| TYPE | Ø [mm] | AREA* [MM2] | SLEEVE LENGTH [MM] | LOOSE, SLEEVES IN BAG [PCS] | SUITABLE TAGS |
|-------|-------------|---------------|------------------------|-----------------------------|---------------|
| PT+02 | 1.3 - 3.0 | ~0.25 - 1.5 | 12 / 15 / 18 / 21 / 30 | 200 | PF, PP+ |
| PT+10 | 2.5 - 5.0 | ~1.5 - 4.0 | 12 / 15 / 18 / 21 / 30 | 200 | PF, PP+ |
| PT+20 | 4.0 - 10.0 | ~2.5 - 16.0 | 12 / 15 / 18 / 21 / 30 | 100 | PF, PP+, PFC |
| PT+30 | 8.0 - 16.0 | ~16.0 - 75.0 | 12 / 15 / 18 / 21 / 30 | 50 | PF, PP+, PFC |
| PT+40 | 14.0 - 22.0 | ~50.0 - 150.0 | 15 / 21 / 30 | 50 | PP+, PFC |

PT+PFC Transparent sleeve with transparent pocket for PFC

| TYPE | Ø [mm] | AREA* [MM2] | SLEEVE LENGTH [MM] | LOOSE, SLEEVES IN BAG [PCS] | SUITABLE TAGS |
|----------|-----------|-------------|------------------------|-----------------------------|---------------|
| PT+PFC02 | 1.3 - 3.0 | ~0.25 - 1.5 | 12 / 15 / 18 / 21 / 30 | 200 | PFC |
| PT+PFC10 | 2.5 - 5.0 | ~1.5 - 4.0 | 12 / 15 / 18 / 21 / 30 | 200 | PFC |

PTZ+ Coloured sleeve with transparent pocket

| TYPE | Ø [mm] | AREA* [MM2] | SLEEVE LENGTH [MM] | LOOSE, SLEEVES IN BAG [PCS] | SUITABLE TAGS |
|--------|------------|-------------|------------------------|-----------------------------|---------------|
| PTZ+02 | 1.3 - 3.0 | ~0.25 - 1.5 | 12 / 15 / 18 / 21 / 30 | 200 | PF, PFC, POZ |
| PTZ+10 | 2.5 - 5.0 | ~1.5 - 4.0 | 12 / 15 / 18 / 21 / 30 | 200 | PF, PFC, POZ |
| PTZ+20 | 4.0 - 10.0 | ~2.5 - 16.0 | 12 / 15 / 18 / 21 / 30 | 100 | PF, PFC, POZ |

PTM Transparent sleeve with wings

| TYPE | Ø [mm] | AREA* [MM2] | SLEEVE LENGTH [MM] | LOOSE, SLEEVES IN BAG [PCS] | SUITABLE TAGS |
|-------|--------|-------------|--------------------|-----------------------------|---------------|
| PTM10 | - | - | 23/30 | 500 (in carton box) | PP+, PFC |
| PTM20 | - | - | 20 | 500 (in carton box) | PFC |

*Area sizes for guidance only. Thickness of the cable insulation can differ between different manufacturer. Please contact Partex for sample bags.

Colours:



Related products:



PP+



PFC



PF



Cable Ties

INSERTS FOR SLEEVES

PP+

Flat semi hard profile suited for PT+, PTC, PTM and PM sleeves.



| TYPE | Material | Temperature range |
|------|----------|-------------------|
| PC | PVC | -20°C to +60°C |


Sizes and packaging:

| TYPE | Description | COMPACT DISC WIDTH [MM] | COMPACT DISC LENGTH [M] | DN-REEL LENGTH [M] |
|------------|-------------------|-------------------------------|-------------------------|--------------------|
| PP+profile | Flat hard profile | 4.6 / 6.3 / 9.0 / 10.2 / 11.0 | 17 | 50 |

Colours:



Marking methods:



Related products:



PROMARK
printers



EOS and MK10
printers



PM



PT+



PTC



PTM

PFC

PFC card is marking system in credit card format with easily detachable marker tags. Card variants with adhesive labels for component marking, cable marker tags for direct mounting with cable ties.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------------------------|-----------|---|
| PFC042, PFC075, PFC095 | ABS | -40°C to +60°C |
| PFC070, PFC127, PFC450 | Polyester | Shape permanence (ABS) from -30°C to +60°C. |


Sizes and packaging:

| TYPE | Description | MARKER TAG LENGTH [MM] | MARKER TAG HEIGHT [MM] |
|----------|-------------------------------------|------------------------|------------------------|
| PFC042 | For wire marking | 12 / 15 / 18 / 21 / 30 | 4.2 |
| PFC07533 | For cable marking | 33 | 7.5 |
| PFC09518 | For component or cable marking | 17.5 | 9.5 |
| PFC095 | For cable marking | 40 / 80 | 9.5 |
| PFC07014 | With adhesive for component marking | 14 | 7.0 |
| PFC12726 | With adhesive for component marking | 25.4 | 12.7 |
| PFC45080 | With adhesive for component marking | 80 | 45.0 |

Colours:



Marking methods:



Related products:



PT+PFC



PTZ+



PTC



PM



PS



PTM



Cable Ties



Primacy

PF

Halogen free, rigid label material for cables, wires, cabinets and components. For Partex holder systems PT+, PTZ+, PTC, PM and PS.



| TYPE | MATERIAL | TEMPERATURE RANGE |
|------|--|-------------------|
| PC | Polyester foil, specially preprocessed for printing. | -30°C to +120°C |


Sizes and packaging:

| TYPE | WIDTH [MM] | LENGTH [MM] | NUMBER OF LABELS PER SHEET [PCS] | NUMBER OF SHEETS PER PACK [PCS] | DESCRIPTION |
|----------|------------|-------------|----------------------------------|---------------------------------|-------------------------------|
| PF-10015 | 4.6 | 15.0 | 792 | 10 | Yellow or White |
| PF-10021 | 4.6 | 21.0 | 594 | 10 | Yellow or White |
| PF-20018 | 9.5 | 17.5 | 352 | 10 | Yellow or White |
| PF-07533 | 7.6 - 7.8 | 33.0 | 100 | 10 | White |
| PFA20018 | 9.5 | 17.5 | 352 | 10 | Yellow or White with adhesive |

Colours:



Marking methods:



Related products:



PT+



PTZ+




PTC



PM



PS

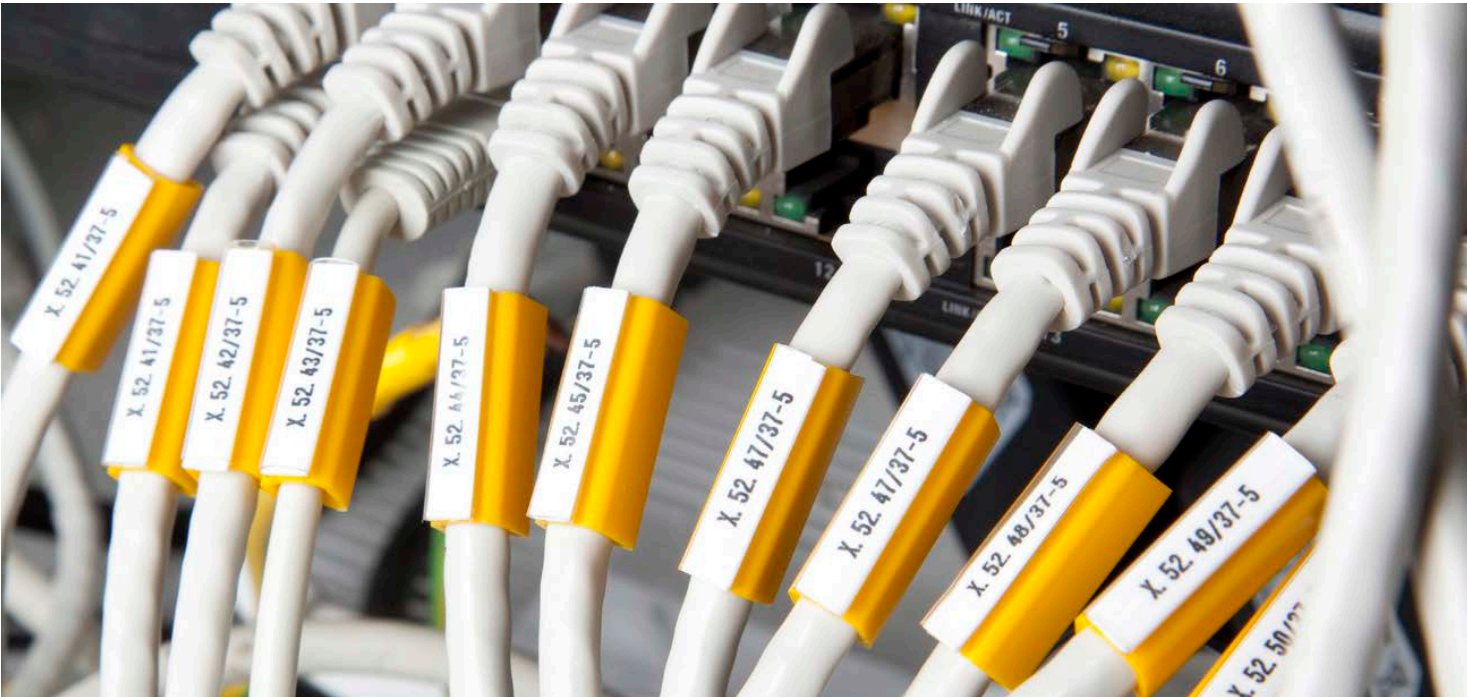

PRINTERS



PROMARK T-2000

A compact, fast and portable marking printer of markers for cables, wires, and components. Feeds, prints and cuts Partex profile. Bluetooth wireless connection allows you to control the printer from mobile devices using Promark Creator GO app. Powered by 6 dedicated AA batteries with a capacity of 1900 mAh each or by power grid. Printer menu is available in 10 languages.

Basic kit includes

- | PROMARK T-2000 Printer
- | Promark Creator software
- | Power cable, USB cable, AC adapter
- | Ink ribbon (40 m)
- | Tube attachment
- | Reel stand
- | Soft carrying case
- | PO-05 profile, PO-068TW profile

Information

Print: Ribbon, thermal transfer printing
 Speed: 18,5, 25 or 40 mm/s
 PC connection: USB, Bluetooth
 Profile types: Continuous profiles Tape cassettes

Markers printed on device:



Related products:



Ribbon

PRIMACY

Compact and powerful card printer, easy to use, high performance and user-friendly. Prints on to Partex PFC cards.



Basic kit includes

- | PRIMACY card printer
- | Software
- | Ribbon
- | Printer cable

Information

Print: Ribbon, thermal transfer printing
 Speed: 1000 cards/hour
 PC connection: USB
 Profile types: PFC cards

Markers printed on device:



PFC

PRINTER SOFTWARE

PROMARK CREATOR Software

Promark Creator is the perfect tool for designing and managing the production of markers. It is an intuitive program that allows you to flawlessly select markers with the right parameters.

Above all, however, it allows you to easily design even the most complex and complicated description, and this is achieved by an advanced expression editor for imported data. A must-have for designers.

Most useful for owners of PROMARK, MK10 and EOS printers or office laser printers. Design and mark.

Features

- | Easy data import from various sources, including excel.
- | Create your own marking project, where you easily create complex and detailed markers. Ability to insert images, QR code and barcode.
- | Promark Creator GO. Control printer via mobile device with app and Bluetooth.
- | Store and share Promark Creator files in the Partex cloud.
- | During print of a project, you can start work on the next project.
- | Print on one or more devices simultaneously.



ACCESSORIES

Cable ties

A selection from our range of cable ties for indoor and outdoor installation.



| TYPE | DESCRIPTION |
|------------------|---|
| Nylon | Cable ties of high quality Nylon 6.6. |
| UV resistant | Ultra-violet resistant cable ties, specially manufactured with extra carbon added. |
| Metal detectable | A blue nylon cable tie with metal content spread throughout the material. Detectable by standard metal detectors. For example it is used by food, pharmaceutical and chemical industries. |
| Metal barbed | A smooth cable tie with a stainless steel "barbed tooth" providing higher flexibility and higher strength for demanding environments. |
| Accessories | Cable fixings, cable tie bases, mounts and tools. |

Stainless steel cable tie

A selection from our range of cable ties for indoor and outdoor installation.



| TYPE | DESCRIPTION |
|-----------------|--|
| Stainless Steel | Stainless steel cable ties for tough environments. Available in both uncoated and pure polyester coated 316 grade stainless steel. |

Edge clip / Cable tie

Ideal for use where holes are not acceptable or where due to temperature problems adhesives will fail. Widely used in the solar sector.



| TYPE | DESCRIPTION |
|-----------|---|
| Edge Clip | Two-piece component consisting of a cable tie and an edge clip for fixing at the edges. |

PAD

Applicator for PA markers. For use with single character markers, it reduces installation time significantly. Single character markers are loaded on to the applicator to form the completed legend, then slid on to the wire in one action.



| TYPE | DESIGNED FOR | MATERIAL |
|--------|--------------|-----------------|
| PAD-3M | PA-02 | Stainless steel |
| PAD-3T | PA-02 | Teflon coated |
| PAD-4M | PA-1 | Stainless steel |
| PAD-4T | PA-1 | Teflon coated |
| PAD-5M | PA-1 | Stainless steel |
| PAD-5T | PA-1 | Teflon coated |



Compartment boxes

Compartment cable marker assortment box with transparent cover, perfect for storing markers and accessories. Easy to use at installation site. Special filling combinations available to order.



| TYPE | DESCRIPTION |
|-----------------|---|
| PSK55000 - PA1 | 49 removable compartments containing PA1 markers: A-Z, 0-9, -, /, GRD, +, -, Blank, L1, L2, L3, N, Teflon-coated installation tool in stainless steel |
| PSK55000 - PA2 | 50 removable compartments containing PA2 markers: A-Z, 0-9, -, /, GRD, +, -, Blank, L1, L2, L3, N |
| PSK55000 - PA02 | 49 removable compartments containing PA02 markers and installation tools: A-Z, 0-9, -, /, GRD, +, -, Blank, L1, L2, L3, N, Teflon-coated installation tool in stainless steel |
| PSK55000 - PK2 | 40 removable compartments containing PK2 markers, holders and cable ties: A-Z, 0-9, -, /, GRD, +, -, POH07 holders, POH12 holders, PKB25100A9 cable ties, PKB25100A0 cable ties |
| PSK55000 - PKS | 40 removable compartments containing PKS markers, holders and cable ties: A-Z, 0-9, -, /, GRD, +, -, cable ties PKS46150AN16, holders PKS10060FQS, holders PKS10100FQS |

MD / MDH

Complete marking kit for on site work. The MD installation tool and MDH holder form a complete installation magazine for PA sleeves. Excellent aid when working on installation or maintenance. The holder is easily loaded with MD applicators. S steel holders for single character markers. Available with slits and holes.



| TYPE | MATERIAL | COLOUR |
|------|-------------|------------------------------|
| MD | Acetal | Red for PA02 or blue for PA1 |
| MDH | Polystyrene | |

Sizes and packaging:

| TYPE | HOLDER AND APPLICATOR WITH STANDARD KIT | EMPTY HOLDER | EMPTY APPLICATORS | APPLICATOR WITH STANDARD KIT | APPLICATOR WITH COLOUR CODE | APPLICATOR WITH 3-PHASE MARKING KIT |
|-------------|---|--------------|-------------------|------------------------------|-----------------------------|-------------------------------------|
| PA-02 (Red) | MDH2002S | MDH2002 | MD-02 | MD-02S | MD-02SCC.09 | - |
| PA-1 (Blue) | MDH2010S | MDH2010 | MD-10 | MD-10S | MD-10SCC.09 | MD-10FMS |

CAS / PAM

Cassette for PA02- and PA1 sleeves. Red for PA02 and blue for PA1. Flexible aid for service and maintenance marking. Pocket-size - easy to take along. CAS is double-sided for right and left mounting. PAM has transparent upper side which simultaneously protects the sleeve.



Information:

| CASSETTES | DESIGNED FOR | CASSETTE COLOUR | MAX NUMBER OF SLEEVES [PCS] |
|-----------|--------------|-----------------|-----------------------------|
| CAS-600 | PA-02 | Red | 600 |
| CAS-500 | PA-1 | Blue | 500 |
| PAM-02 | PA-02 | Red | 440 |
| PAM-10 | PA-1 | Blue | 440 |

PACKAGING



Reel

Semi cut markers



Unsorted

Standard number sequences



Carton

Marker strips



Compact disk (SN)

Semi cut markers continuous marker profile



Sorted

To suit customer requirements



DN-reel

Continuous profile



Strip pack

Cut loose markers



Paginated

Standard number sequences



BN-reel

Continuous marker profile



Single bag

Marker strips



Mini box (MB)

Heat shrinkable tubing



Box (KN)

Continuous profile
High quantity



OUR LOCATIONS

National footprint with strategic local stockholdings.

APS Industrial is headquartered in Melbourne and in addition has a national network of offices in Adelaide, Perth, Sydney, Brisbane and Tasmania supported by strategic local stockholdings and expert technical and application knowledge.

apsindustrial.com.au

CONNECT WITH US



MELBOURNE

5-7 Corporate Ave,
Rowville, Melbourne VIC 3178
Ph: (03) 8514 3500
Sales: 1300 309 303
Email: vic@apsindustrial.com.au

SYDNEY

391 Park Rd, Block P,
Regents Park, NSW, 2143
Ph: (02) 8898 6200
Sales: 1300 309 303
Email: nsw@apsindustrial.com.au

BRISBANE

49 Borthwick Avenue,
Murarrie, Brisbane, QLD, 4172
Ph: (07) 3063 3100
Sales: 1300 309 303
Email: qld@apsindustrial.com.au

ADELAIDE

159-163 Caulfield Ave,
Clarence Gardens, SA 5039
Ph: (08) 8111 5100
Sales: 1300 309 303
Email: sa@apsindustrial.com.au

PERTH

5 Glyde Court, Malaga,
Malaga, Perth WA 6090
Ph: (08) 6118 5300
Sales: 1300 309 303
Email: wa@apsindustrial.com.au

HOBART

441A Macquarie Street,
South Hobart, TAS, 7004
Sales: 1300 309 303
Email: tas@apsindustrial.com.au